


CHARACTERIZATION OF POLYMERS BY MEANS OF TG-FTIR (III)





Ekkehard Füglein and Claire Louis

NETZSCH-Gerätebau GmbH, Wittelsbacherstraße 42, D-95100 Selb, Germany


PMMA

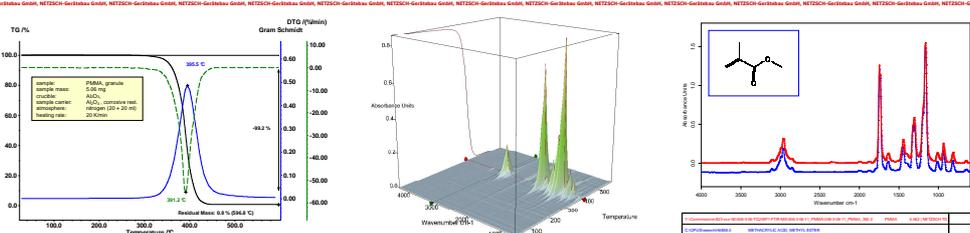



PA66

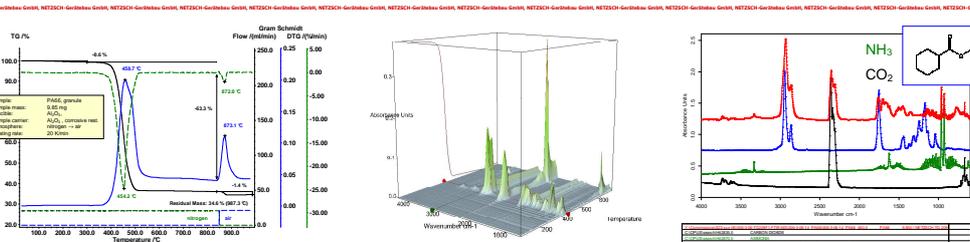


ABS

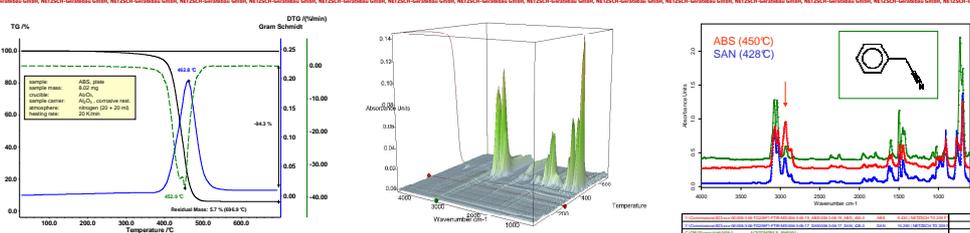

PBT

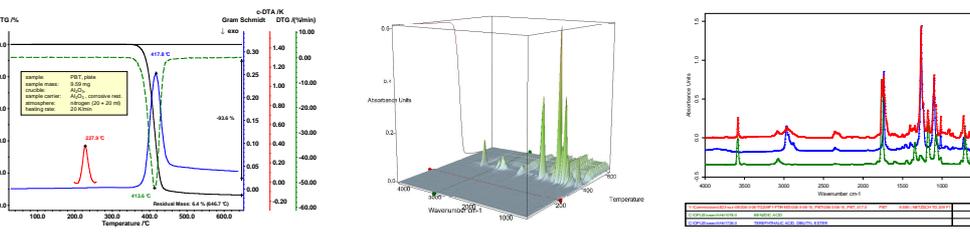

SAN

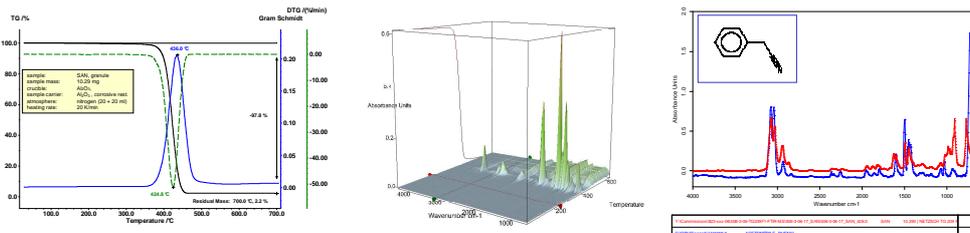

All measurements were carried out employing alumina crucibles, heating rate: 20 K/min, atmosphere: nitrogen, purge gas flow rate: 40 ml/min